


LongLite

Energy Efficient Light Control



adding daylight to life Proudly Australian Made & Owned

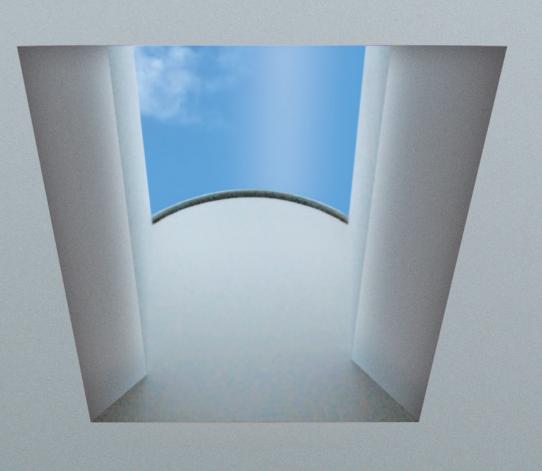

belray

LongLite[™]

Linear skylights – single module or continuous run

- LongLite[™] skylights are suited to stadium and warehouse applications.
- Flexibility of design allows LongLite[™] skylights to be used in all roof types, although they are most commonly used in horizontal situations such as ridge lines and deck roofs.
- Low maintenance, anti-condensation design makes LongLite[™] completely weather proof.
- Available as double glazed (for improved insulation) or single glazed units, depending on project requirements.
- LongLite[™] features an Aluminium Glazing bar system at each end for increased strength to ensure glazing sheets remain fixed in place under high wind conditions.
- Most commonly used glazing are standard Acrylic, high impact Acrylic and Polycarbonates.
- When glazing is fixed there is no penetration of glazing, allowing unrestricted thermal movement.
- LongLite[™] is also available in a continuous form using an Aluminium Structural glazing bar, eliminating bulk heads between the LongLites.
- Suitable for all roof types and roof pitches.
- Available in Colorbond®, Zincalume® and galvanized finishes.



Energy Efficient Light Control

LongLite[™] Standard Size Chart*

size (mm)	actual throat size(sq.m)	ventilation area(sq.m)
1200 X 500	O.6	0.095
1200 X 600	0.72	0.095
1200 X 800	O.96	0.095
1200 X 1000	1.2	0.095
1200 X 1200	1.44	0.095
2400 X 500	1.2	O.19
2400 X 600	1.44	O.19
2400 X 800	1.92	O.19
2400 X 1000	2.4	O.19
2400 X 1200	2.88	O.19

* Other sizes available









125 Chesterville Road Moorabbin VIC 3189 Tel (O3) 9555 2388 Fax (O3) 9532 3470 Email info@belleskylights.com.au Web www.belleskylights.com.au

